

University of Nebraska - Lincoln

## DigitalCommons@University of Nebraska - Lincoln

---

Architectural Engineering -- Faculty Publications

Architectural Engineering and Construction,  
Durham School of

---

2011

### Combinatorics & Power Consumption

Mahmoud Alahmad

University of Nebraska - Lincoln, [malahmad2@unl.edu](mailto:malahmad2@unl.edu)

Wisam Nader

University of Nebraska-Lincoln, [wnader@unomaha.edu](mailto:wnader@unomaha.edu)

Follow this and additional works at: <https://digitalcommons.unl.edu/archengfacpub>



Part of the [Architectural Engineering Commons](#)

---

Alahmad, Mahmoud and Nader, Wisam, "Combinatorics & Power Consumption" (2011). *Architectural Engineering -- Faculty Publications*. 54.

<https://digitalcommons.unl.edu/archengfacpub/54>

This Article is brought to you for free and open access by the Architectural Engineering and Construction, Durham School of at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Architectural Engineering -- Faculty Publications by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# Combinatorics & Power Consumption

Mahmoud Alahmad, Assistant Professor  
Architectural Engineering  
University of Nebraska-Lincoln  
Omaha, USA  
malahmad2@unl.edu

Wisam Nader, MS student  
Architectural Engineering  
University of Nebraska-Lincoln  
Omaha, USA  
wnader@unomaha.edu

**Abstract**— in this paper the power consumption possible combinations for a number of loads and a single power source are discussed. The proposed mathematical model depends basically on combinatorics to estimate how many ways are possible to operate different loads powered by a single power source. This paper takes into consideration the different conditions and limitations to operate n number of loads limited by their minimum and maximum values of power consumption. Four different cases of operations are discussed and modeled. A flowchart and a step-by-step method to do the calculations for a general case is also illustrated at the end of this paper.

**Index Terms**— combinatorics, combinations, load, model, operation, power consumption.

## I. INTRODUCTION

A power consumption model is proposed in this paper. The model focuses basically on calculating the number of the ways possible to operate a system of a specific number of power consuming devices. Combinatorics has been used by researchers and engineers in many fields of science. Combinatorics-based methodology is proposed in [1] to calculate pulse repetition frequency (PRF) set quality. In [2] realizing electronic circuit components is based on a combinatorics based algorithm and the field programmable analog array (FPAA). Detecting objects via generation of high level combinatorics and applying relational operators is discussed in detail in [3], the proposed method is simple but yet powerful for object detection. To assist in solving combinatorics problems, researchers in [4] have built a virtual environment which helps in modeling, learning and solving such problems. Solving complex problems and counting of possible combinations of solutions can be done by analytic techniques of computer science and combinatorics [5]. Combinatorics are usually found in solving complex systems such as graph theory applications and NP-complete problems [6]. Sparse signal recovery is achieved in [7] by combining two approaches, geometry and combinatorics.

On the other hand, power consumption models have been proposed for different applications and systems. A realistic power consumption model for wireless sensor network devices proposed in [8] can assist in designing the hardware and the software of more energy efficient wireless devices and their power management systems. Another power consumption model of wireless networks is designed, implemented and validated in [9] using wireless devices from the market. Models to forecast power consumption of power systems are proposed in [10] to serve the major purpose in commercial relations of regional systems with the wholesale power market.

This paper discusses four possible cases of operating number of n loads powered by a single source.

## II. POSSIBLE CASES OF POWER CONSUMPTION COMBINATIONS

### a. Case1: loads have just two states: on or off

For this case we assume that each load can be either turned on (i.e. load number i is in On-State and consuming power  $P_i$ ), or turned off (i.e. load number i is in Off-State and consuming no power  $P_i = 0$ ), and any load can be turned on or off without any condition or limitation. In this case the number of power consumption combinations/possibilities is given in (1):

$$2^n = \sum_{i=0}^n C_n^i \quad (1)$$

2: Indicates that the load has two states: on & off states.

$2^n$  : Indicates the number of all the possible combinations of the operation of n loads. This number equals exactly the number of all the possible values of a digital word of n bits. Table 1 shows that the combinations of loads being on or off can be understood as the possible values of an n-bit digital number.

Table 1: Load combinations as an n-bit digital number

$\sum_{k=0}^n \binom{n}{k}$  is the sum of the possible combinations

Where:

$$\sum_{k=0}^n \binom{n}{k} = \binom{n}{0} + \binom{n}{1} + \binom{n}{2} + \dots + \binom{n}{n}$$

and:

$$\binom{n}{k} = \frac{n!}{(n-k)!k!}$$

So, no load is turned on (i.e. no power consumption at all); or one load out of n loads is turned on, two loads out of n loads is turned on, . . . , or all the loads are turned on. Depending on load combinations, each load combination has its associate total power consumption  $P_t$ , assuming that there is no limitation on the power source capacity (i.e. the power source can provide power for the worst case scenario when all the loads are turned on and consuming power. Hence, there are  $2^n$  possible values, assuming that the power supply can accommodate any possible power consumption needs. What if the power source cannot deliver more than a specific value  $P_t$ , and the total power consumption in some cases when, for instance, all the loads are turned on exceeds the power source capacity? Case2 discusses how many load combinations there are in this case.

*b. Case2: limited power supply capacity & unlimited load values*

This case can be solved using the linear equation model. The instantaneous total power consumption is given in (2):

$$P_1 + P_2 + P_3 + \dots + P_n = P_t \quad (2)$$

Assuming that  $P_1, P_2, \dots, P_n \geq 0$  and the power consumption of all the loads can be dimmed to an integer value, for example: the power consumption of load  $P_i$  can be 0, 1, 2, . . . ,  $P_t$  Watts. The number of possible load consumption combinations for this case is given in (3):

$$\binom{n+P_t-1}{P_t} = \frac{(n+P_t-1)!}{(n-1)!P_t!} \quad (3)$$

*c. Case3: limited power supply capacity & load values with a limit on their minimum values*

<b>Possible state</b>	On	On	On	..	On
	Off	Off	Off	..	Off
<b>Loads</b>	$P_1$	$P_2$	$P_3$	..	$P_n$
<b>Digit Position</b>	1	2	3	..	n
<b>Possible state</b>	1	1	1	..	1
	0	0	0	..	0

This case can still be solved using the linear equation model given in (2). Assuming that:

$$P_1 \geq P_{1\_min}, P_2 \geq P_{2\_min}, \dots, P_n \geq P_{n\_min}$$

and that the power consumption of any load can be dimmed to an integer minimum value, for example: the power consumption of load  $P_i$  can be 5, 6, 7, . . . ,  $P_t$  Watts if  $P_{i\_min}$  is 5.

Case3 can be converted to Case2 by writing the linear equation as in (4):

$$(P_1 - P_{1\_min}) + (P_2 - P_{2\_min}) + \dots + (P_n - P_{n\_min}) = P_{tt} \\ P_t - (P_{1\_min} + P_{2\_min} + \dots + P_{n\_min}) = P_{tt} \quad (4)$$

Where:

$$P_{tt} = P_t - (P_{1\_min} + P_{2\_min} + \dots + P_{n\_min})$$

Since:

$$(P_1 - P_{1\_min}) \geq 0, \quad (P_2 - P_{2\_min}) \geq 0, \quad \dots \\ \dots (P_n - P_{n\_min}) \geq 0$$

Then the solution of this equation (which is the number of possible load consumption combinations for this case) is:

$$\binom{n+P_{tt}-1}{P_{tt}} = \frac{(n+P_{tt}-1)!}{(n-1)!P_{tt}!}$$

*d. Case 4: limited power supply capacity & load values with a limit on their minimum and maximum values*

This case is more complicated than Case3 and can be solved using the linear equation model and the principle of inclusion & exclusion.

The instantaneous total power consumption is always given by the same equation in (2):

$$P_1 + P_2 + P_3 + \dots + P_n = P_t$$

Assuming that:

$$P1_{max} \geq P1 \geq P1_{min}, P2_{max} \geq P2 \geq P2_{min}, \dots \\ \dots, Pn_{max} \geq Pn \geq Pn_{min},$$

and that the power consumption of all the loads is an integer value, for example: the power consumption of load  $P_i$  can be 5, 6, 7, . . . , 12 Watts if  $P_{i\_min}$  is 5 Watts and  $P_{i\_max}$  is 12 Watts. Subtracting  $P_{i\_min}$  from all the load power values will result in the equation given in (5):

$$(P1 - P1_{min}) + (P2 - P2_{min}) + \dots + (Pn - Pn_{min}) = \\ P_t - (P1_{min} + P2_{min} + \dots + Pn_{min}) \quad (5)$$

That yields to:

$$P1_{new} + P2_{new} + \dots + Pn_{new} = P_{tt}$$

The total number of solutions for this problem if there were no other conditions on the maximum values of  $P_{i\_new}$  is:

$$\binom{n + P_{tt} - 1}{P_{tt}} = N = \frac{(n + P_{tt} - 1)!}{(n - 1)! P_{tt}!}$$

But:

$$P_{i\_new} = P_i - P_{i\_min}$$

with the following conditions:

$$(P1_{max} - P1_{min}) \geq P1_{new} \geq 0$$

For  $i = 1, 2, 3, \dots, n$

To solve this equation the opposite conditions are used instead, which are:

$$P_{i\_new} \geq (P_{i\_max} - P_{i\_min})$$

Or

$$P_{i\_new} \geq (P_{i\_max} - P_{i\_min} + 1)$$

$$P_{i\_new} \geq P_{i\_c}$$

$$P_{i\_c} = (P_{i\_max} - P_{i\_min} + 1)$$

So the opposite conditions are:

$$C1: P1_{new} \geq P1_c$$

$$C2: P2_{new} \geq P2_c$$

.

$$Cn: Pn_{new} \geq Pn_c$$

And in general, the opposite condition for load number  $i$  is:

$$Ci: P_{i\_new} \geq P_{i\_c}$$

Supposing that  $Ci''$  is the original condition for load number  $i$ , which means  $Ci''$  is the opposite condition of  $Ci$  and given in (6):

$$Ci'': P_{i\_new} \leq P_{i\_c} \quad (6)$$

Then the solution of Case4, which is the general case, is given in (7):

$$|C1'' . C2'' \dots Cn''| = N \\ - \sum_{i=1}^n |Ci| \\ + \sum_{1 \leq j1 < j2 \leq n} |Cj1 . Cj2| \\ - \sum_{1 \leq j1 < j2 < j3 \leq n} |Cj1 . Cj2 . Cj3| \\ + \dots \\ + (-1)^n . |C1 . C2 \dots Cn| \quad (7)$$

Where:

$\sum_{i=1}^n |Ci|$  is the sum of numbers of solutions to the formulas satisfying conditions  $Ci$  from 1 to  $n$  and only once at a time

$\sum_{1 \leq j1 < j2 \leq n} |Cj1 . Cj2|$  is the sum of numbers of solutions to the formulas satisfying two conditions  $Cj1$  and  $Cj2$ , where  $1 \leq j1 < j2 \leq n$

$\sum_{1 \leq j1 < j2 < j3 \leq n} |Cj1 . Cj2 . Cj3|$  is the sum of numbers of solutions to the formulas satisfying three conditions  $Cj1$ ,  $Cj2$  and  $Cj3$ , where  $1 \leq j1 < j2 < j3 \leq n$

$|C1 . C2 \dots Cn|$  is the number of solutions to the problem satisfying all the conditions  $C1$  through  $Cn$ .

To find  $|Ci|$ , condition  $Ci$  only has to be satisfied:

$$P1_{new} + P2_{new} + \dots + (P1_{new} - P1_c) + \dots$$

$$.. + P_{n\_new} = P_{tt} - P_{1\_c} = P_{tt}'$$

Then:

$$|C_1| = \binom{n + P_{tt}' - 1}{P_{tt}'} = \frac{(n + P_{tt}' - 1)!}{(n - 1)! P_{tt}'!}$$

To find  $|C_j|$ .  $C_j|$  both  $C_j|$  and  $C_j|$  have to be satisfied together. Then:

$$P_{1\_new} + P_{2\_new} + ..$$

$$.. + (P_{1\_new} - P_{1\_c}) + .. + (P_{2\_new} - P_{2\_c}) + ..$$

$$.. + P_{n\_new} = P_{tt} - P_{1\_c} - P_{2\_c} = P_{tt}''$$

The yields to:

$$|C_1, C_2| = \binom{n + P_{tt}'' - 1}{P_{tt}''} = \frac{(n + P_{tt}'' - 1)!}{(n - 1)! P_{tt}''!}$$

And the same method can be used to calculate  $|C_1, C_2, C_3|$  through  $|C_1, C_2, .. C_n|$ .

An algorithm for calculating all the possible combinations of Case4 is illustrated in fig. 1.

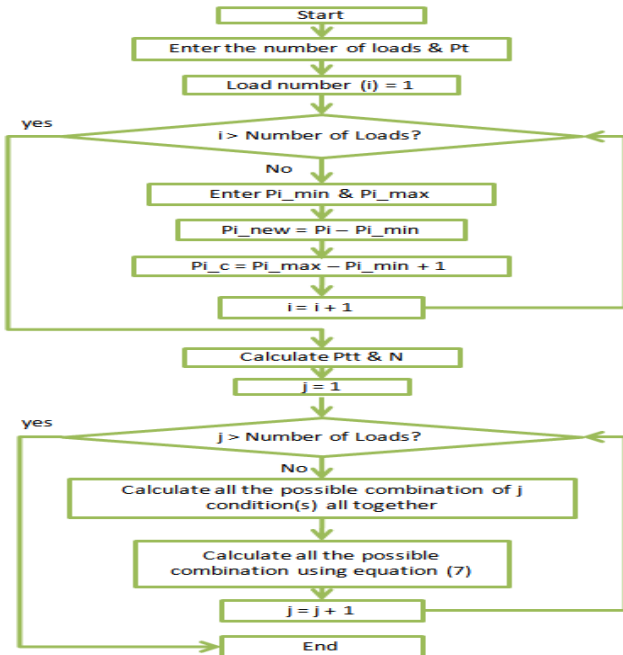


Figure 1: A flowchart for calculating all the possible combinations of the operating modes of number of loads

### III. CONCLUSION

This paper has shown the possible four cases for operating a number of loads powered from a single power source. Case4

provides general equations and a method to calculate all the possible operating modes possible of the loads. Case4 can be used for any other type of loads such as mechanical loads, it can also be used to assist other applications and systems, such as power management systems, to give, for instance, a quick pointer/indicator whether another possible combination is possible, so that the power management system will try turning on/off and/or dimming loads to achieve the optimal power consumption according to the conditions and limitations of the system.

### REFERENCES

- [1] Thomas, A.G.; Berg, M.C.; , "Medium PRF set selection: an approach through combinatorics," *Radar, Sonar and Navigation, IEE Proceedings* - , vol.141, no.6, pp.307-311, Dec 1994.
- [2] Györök, G.; Mako, M.; Lakner, J.; , "Combinatorics at electronic circuit realization in FPAA," *Intelligent Systems and Informatics, 2008. SISY 2008. 6th International Symposium on* , vol., no., pp.1-4, 26-27 Sept. 2008.
- [3] Venkataraman, V.; Porikli, F.; , "RelCom: Relational combinatorics features for rapid object detection," *Computer Vision and Pattern Recognition Workshops (CVPRW), 2010 IEEE Computer Society Conference on* , vol., no., pp.23-30, 13-18 June 2010.
- [4] Giroire, H.; Le Calvez, F.; Tisseau, G.; , "Benefits of Knowledge-Based Interactive Learning Environments: A Case in Combinatorics," *Advanced Learning Technologies, 2006. Sixth International Conference on* , vol., no., pp.285-289, 5-7 July 2006.
- [5] Szpankowski, W.; , "Analytic algorithmics, combinatorics, and information theory," *Information Theory Workshop, 2005 IEEE* , vol., no., pp. 1 pp., 29 Aug.-1 Sept. 2005.
- [6] Beichl, Isabel; Sullivan, Francis; , "Combinatorics in Computing," *Computing in Science & Engineering* , vol.10, no.2, pp.12-13, March-April 2008.
- [7] Berinde, R.; Gilbert, A.C.; Indyk, P.; Karloff, H.; Strauss, M.J.; , "Combining geometry and combinatorics: A unified approach to sparse signal recovery," *Communication, Control, and Computing, 2008 46th Annual Allerton Conference on* , vol., no., pp.798-805, 23-26 Sept. 2008.
- [8] Qin Wang; Hempstead, M.; Yang, W.; , "A Realistic Power Consumption Model for Wireless Sensor Network Devices," *Sensor and Ad Hoc Communications and Networks, 2006. SECON '06. 2006 3rd Annual IEEE Communications Society on* , vol.1, no., pp.286-295, 28-28 Sept. 2006.
- [9] Qin Wang; Yang, W.; , "Energy Consumption Model for Power Management in Wireless Sensor Networks," *Sensor, Mesh and Ad Hoc Communications and Networks, 2007. SECON '07. 4th Annual IEEE Communications Society Conference on* , vol., no., pp.142-151, 18-21 June 2007.
- [10] Filippova, T.A.; Rusina, A.G.; Dronova, J.V.; , "Forecasting models of power consumption and loading of power systems with features of their functioning in the power market," *Strategic Technology, 2007. IFOST 2007. International Forum on* , vol., no., pp.381-385, 3-6 Oct. 2007.